


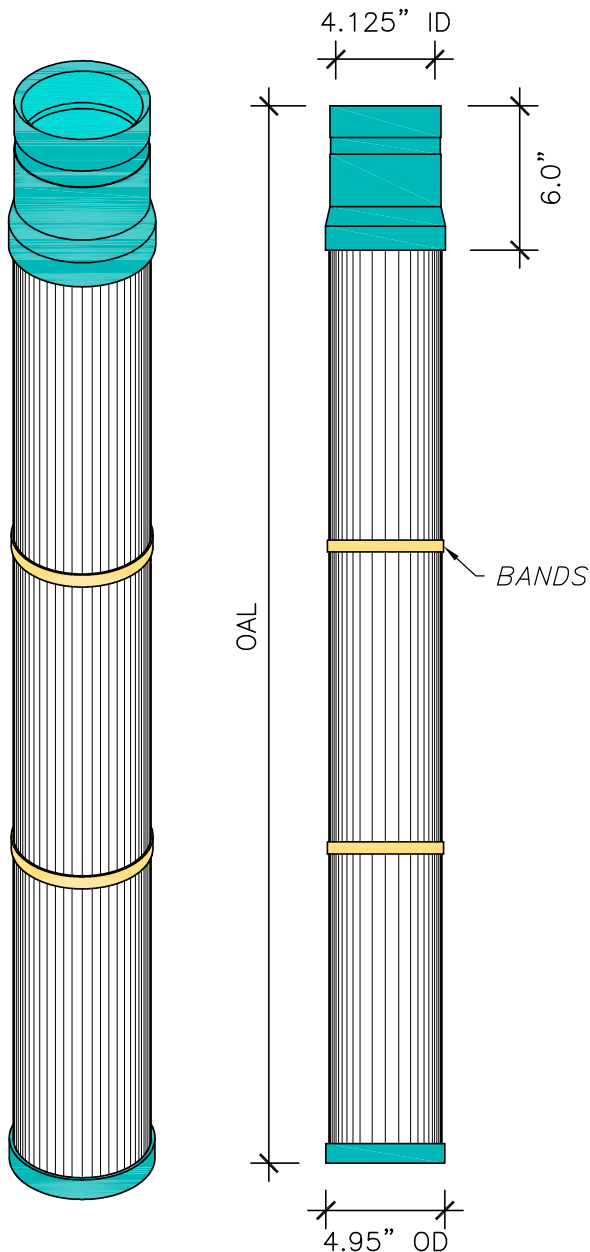

MAXIMUM OPERATING TEMP.
200°F
HIGHER TEMPS. AVAILABLE

PART NUMBER	OVERALL LENGTH	NO. OF BANDS	NO. OF PLEATS	AREA OF MEDIA
MB498445	84"	5	45	28ft./2
MB496445	64"	3	45	21ft./2
MB494445	44"	2	45	14ft./2
MB492545	25"	1	45	7ft./2

CUSTOM LENGTHS AVAILABLE AND PLEAT SPACING AVAILABLE TO SUIT INDIVIDUAL REQUIREMENTS

MEDIA OPTIONS

- SPUN BONDED POLYESTER
- METALLIZED POLYESTER
- POLYESTER WITH PTFE MEMBRANE
- CONDUCTIVE ANTI STATIC (WITH GROUND WIRE)

CENTER CORE OPTIONS

- EXPANDED METAL
- PERFORATED METAL
- POLYPROPYLENE

FAB-TEX FILTRATION

1-888-932-2839

www.fabtextfilters.com

fabtextfiltration@bellnet.ca

PLEATED FILTER ELEMENT

**4.7" MIKROPUL
BOTTOM ACCESS**