


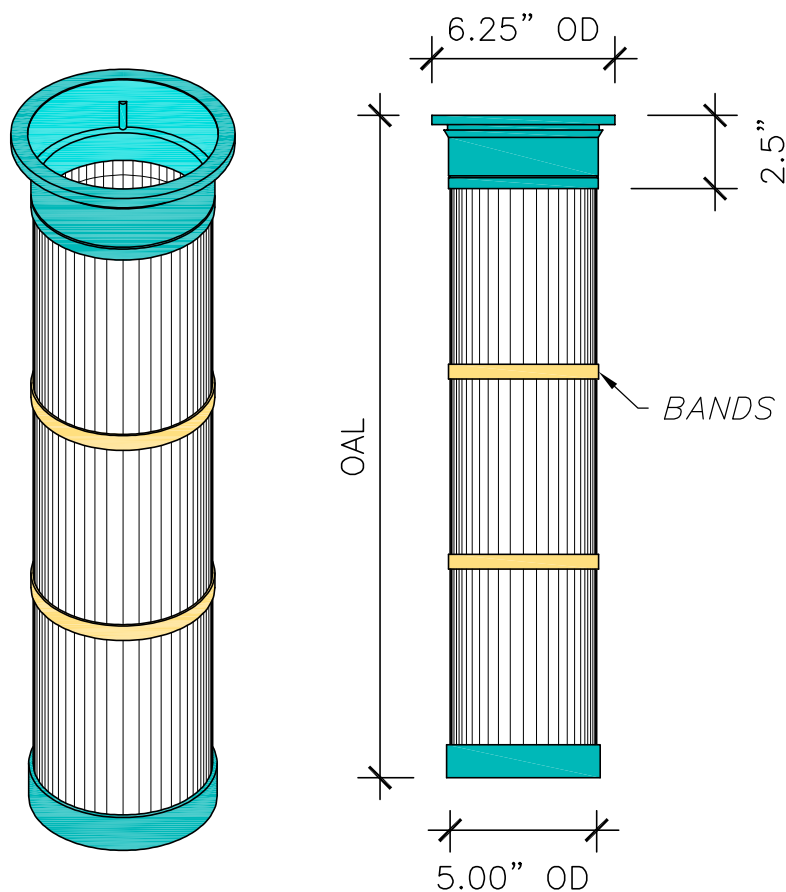

MAXIMUM OPERATING TEMP.
200°F
HIGHER TEMPS. AVAILABLE

PART NUMBER	OVERALL LENGTH	NO. OF BANDS	NO. OF PLEATS	AREA OF MEDIA
ST508145	81"	6	45	26ft./2
ST505745	57"	4	45	18ft./2
ST504245	42"	3	45	13ft./2
ST502245	22"	2	45	6.5ft./2

CUSTOM LENGTHS AVAILABLE AND PLEAT SPACING AVAILABLE
TO SUIT INDIVIDUAL REQUIREMENTS

MEDIA OPTIONS

- SPUN BONDED POLYESTER
- METALLIZED POLYESTER
- POLYESTER WITH PTFE MEMBRANE
- CONDUCTIVE ANTI STATIC
(WITH GROUND WIRE)

CENTER CORE OPTIONS

- EXPANDED METAL
- PERFORATED METAL
- POLYPROPYLENE

FAB-TEX FILTRATION

1-888-932-2839

www.fabtextilters.com

fabtextiltration@bellnet.ca

PLEATED FILTER ELEMENT

5.25" TOP ACCESS

FITS 5.25" DIA. CELL PLATE HOLE