


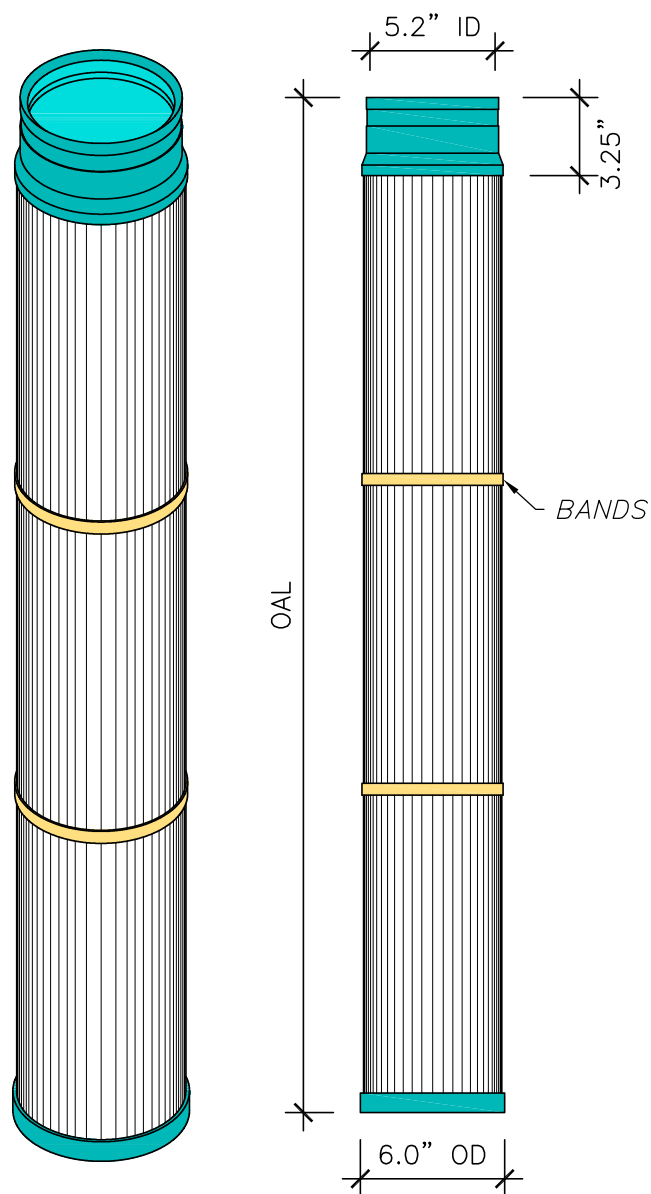

MAXIMUM OPERATING TEMP.
200°F
HIGHER TEMPS. AVAILABLE

PART NUMBER	OVERALL LENGTH	NO. OF BANDS	NO. OF PLEATS	AREA OF MEDIA
MB598245	82"	5	45	47ft./2
MB596245	62"	3	45	35ft./2
MB594245	42"	2	45	23.5ft./2
MB592345	23"	1	45	12ft./2

CUSTOM LENGTHS AVAILABLE AND PLEAT SPACING AVAILABLE TO SUIT INDIVIDUAL REQUIREMENTS

MEDIA OPTIONS

- SPUN BONDED POLYESTER
- METALLIZED POLYESTER
- POLYESTER WITH PTFE MEMBRANE
- CONDUCTIVE ANTI STATIC (WITH GROUND WIRE)

CENTER CORE OPTIONS

- EXPANDED METAL
- PERFORATED METAL
- POLYPROPYLENE

FAB-TEX FILTRATION

1-888-932-2839

www.fabtexfilters.com

fabtexfiltration@bellnet.ca

PLEATED FILTER ELEMENT

5.25" SHORT BOOT
BOTTOM ACCESS