


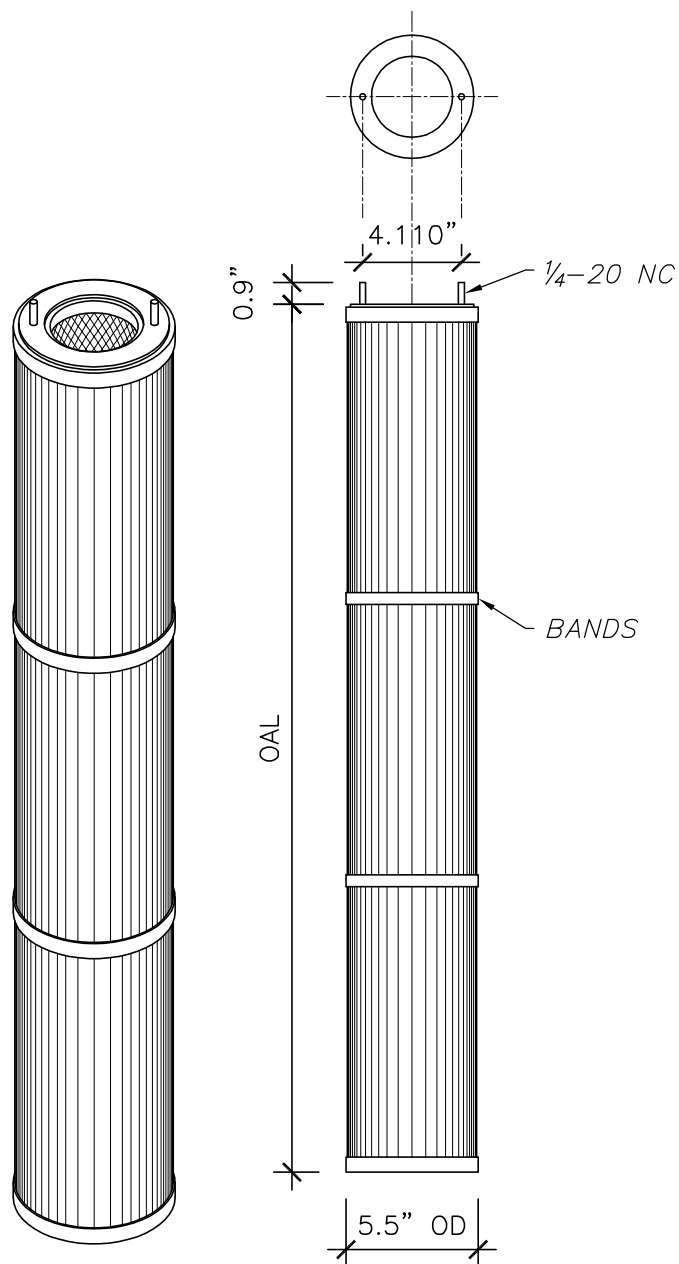

MAXIMUM OPERATING TEMP.
200°F
HIGHER TEMPS. AVAILABLE

PART NUMBER	OVERALL LENGTH	NO. OF BANDS	NO. OF PLEATS	AREA OF MEDIA
FK553645	36"	2	45	22.5ft./2
FK551845	18"	1	45	11ft./2
FK553660	36"	2	60	30ft./2
FK551860	18"	1	60	15ft./2

CUSTOM LENGTHS AVAILABLE AND PLEAT SPACING AVAILABLE TO SUIT INDIVIDUAL REQUIREMENTS

MEDIA OPTIONS

- SPUN BONDED POLYESTER
- METALLIZED POLYESTER
- POLYESTER WITH PTFE MEMBRANE
- CONDUCTIVE ANTI STATIC (WITH GROUND WIRE)

CENTER CORE OPTIONS

- EXPANDED METAL
- PERFORATED METAL
- POLYPROPYLENE

FAB-TEX FILTRATION

1-888-932-2839

www.fabtextilters.com

fabtextiltration@bellnet.ca

PLEATED FILTER ELEMENT

**5.5" 2-BOLT
COMPLEAT**