


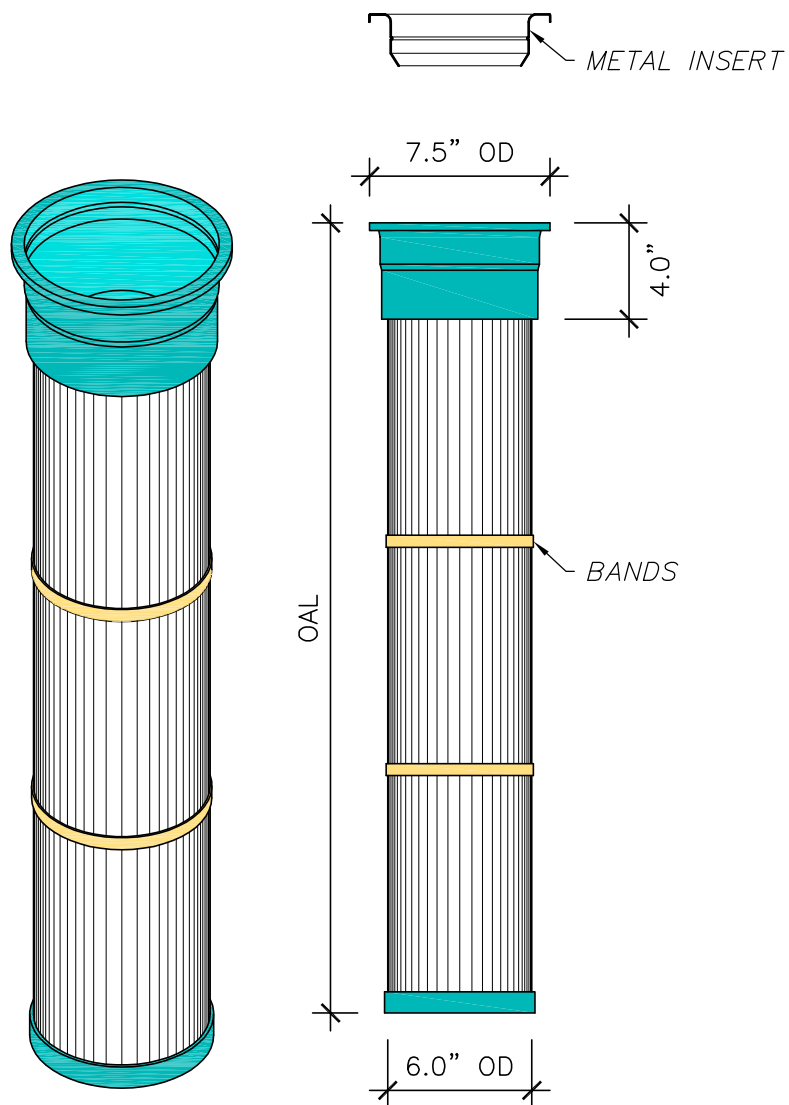

MAXIMUM OPERATING TEMP.
200°F
HIGHER TEMPS. AVAILABLE

PART NUMBER	OVERALL LENGTH	NO. OF BANDS	NO. OF PLEATS	AREA OF MEDIA
MT608345	83"	5	45	49ft./2
MT605745	57"	3	45	37ft./2
MT604345	43"	2	45	25ft./2
MT602445	24"	1	45	12.5ft./2
INSERT# 9921				

CUSTOM LENGTHS AVAILABLE AND PLEAT SPACING AVAILABLE TO SUIT INDIVIDUAL REQUIREMENTS

MEDIA OPTIONS

- SPUN BONDED POLYESTER
- METALLIZED POLYESTER
- POLYESTER WITH PTFE MEMBRANE
- CONDUCTIVE ANTI STATIC (WITH GROUND WIRE)

CENTER CORE OPTIONS

- EXPANDED METAL
- PERFORATED METAL
- POLYPROPYLENE

FAB-TEX FILTRATION

1-888-932-2839

www.fabtextilters.com

fabtextiltration@bellnet.ca

PLEATED FILTER ELEMENT

6.25" TOP ACCESS

INSERT STYLE

FITS 6.25" DIA. CELL PLATE HOLE
UTILIZES RE-USABLE METAL INSERT