


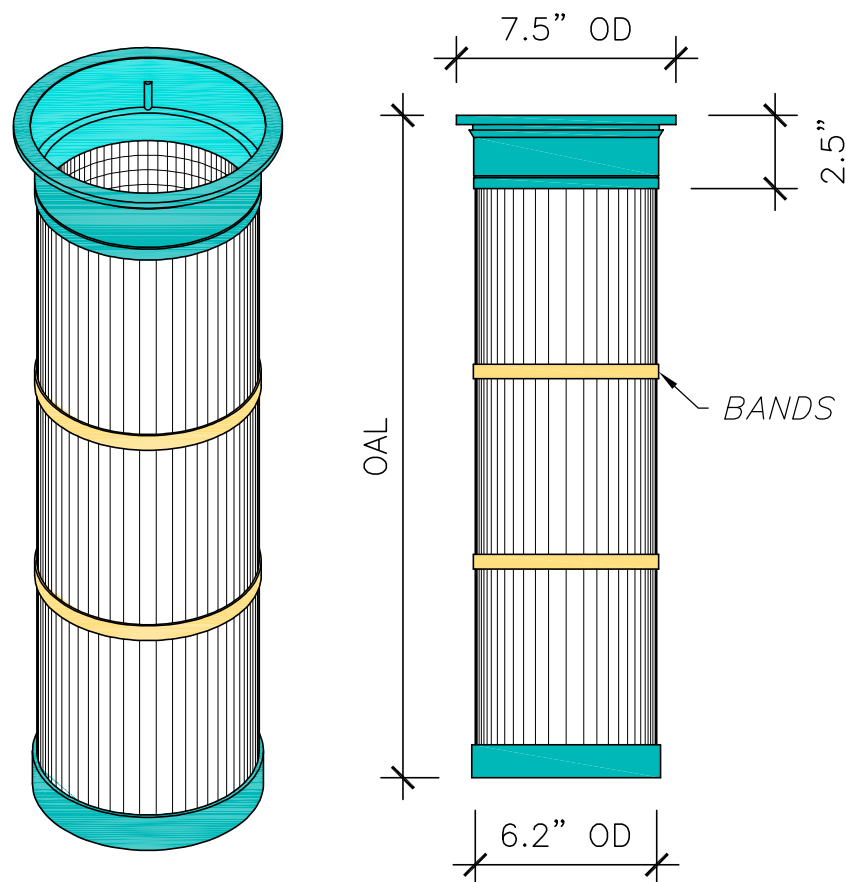

MAXIMUM OPERATING TEMP.
200°F
HIGHER TEMPS. AVAILABLE

PART NUMBER	OVERALL LENGTH	NO. OF BANDS	NO. OF PLEATS	AREA OF MEDIA
ST628145	81"	6	45	58ft./2
ST625745	57"	4	45	41ft./2
ST624245	42"	3	45	29ft./2
ST622245	22"	2	45	14.5ft./2

CUSTOM LENGTHS AVAILABLE AND PLEAT SPACING AVAILABLE TO SUIT INDIVIDUAL REQUIREMENTS

MEDIA OPTIONS

- SPUN BONDED POLYESTER
- METALLIZED POLYESTER
- POLYESTER WITH PTFE MEMBRANE
- CONDUCTIVE ANTI STATIC (WITH GROUND WIRE)

CENTER CORE OPTIONS

- EXPANDED METAL
- PERFORATED METAL
- POLYPROPYLENE

FAB-TEX FILTRATION

1-888-932-2839

www.fabtextilters.com

fabtextiltration@bellnet.ca

PLEATED FILTER ELEMENT

6.25" TOP ACCESS

FITS 6.25" DIA. CELL PLATE HOLE