


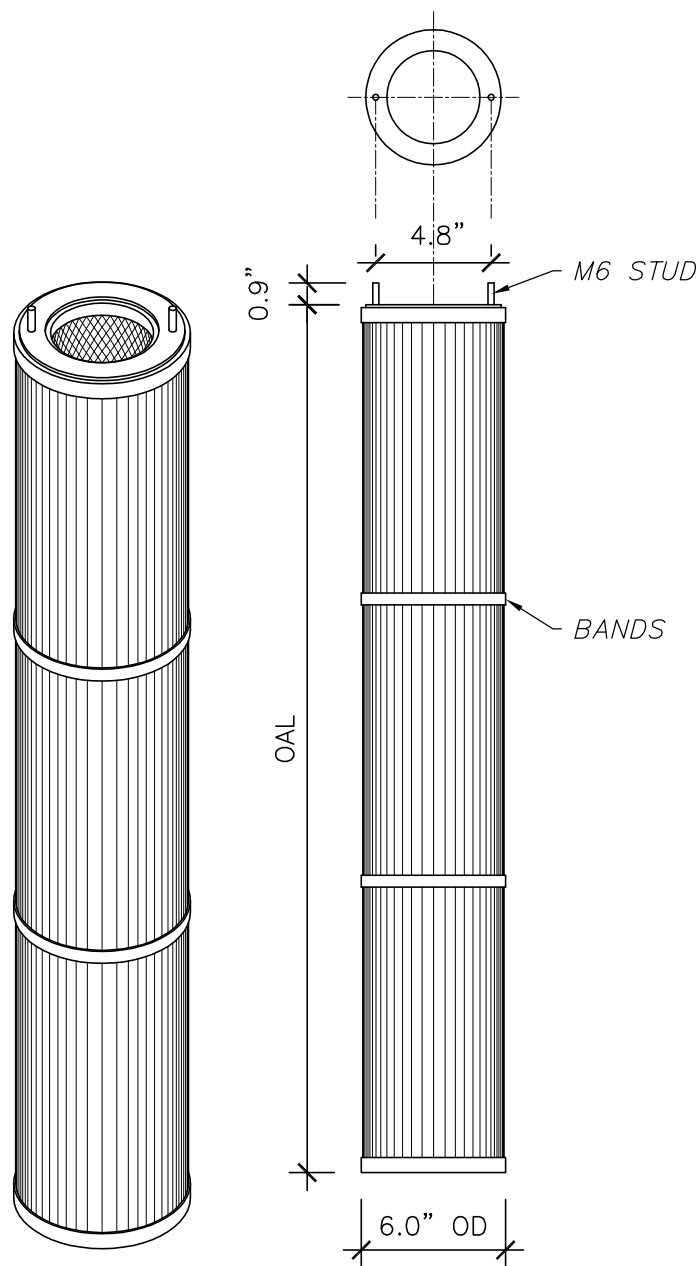

MAXIMUM OPERATING TEMP.
200°F
HIGHER TEMPS. AVAILABLE

PART NUMBER	OVERALL LENGTH	NO. OF BANDS	NO. OF PLEATS	AREA OF MEDIA
AW607245	72"	5	45	39ft./2
AW604845	48"	4	45	26ft./2
AW603645	36"	3	45	19ft./2
AW603045	30"	3	45	16ft./2
AW602045	20"	2	45	10.5ft./2

CUSTOM LENGTHS AVAILABLE AND PLEAT SPACING AVAILABLE TO SUIT INDIVIDUAL REQUIREMENTS

MEDIA OPTIONS

- SPUN BONDED POLYESTER
- METALLIZED POLYESTER
- POLYESTER WITH PTFE MEMBRANE
- CONDUCTIVE ANTI STATIC (WITH GROUND WIRE)

CENTER CORE OPTIONS

- EXPANDED METAL
- PERFORATED METAL
- POLYPROPYLENE

FAB-TEX FILTRATION

1-888-932-2839

www.fabtextilters.com

fabtextiltration@bellnet.ca

PLEATED FILTER ELEMENT

**6" WAM
2-BOLT STYLE
CARTRIDGE**